

- 1** Basicunit*: rail + premounted bracket + connector
- 2** Solar panel
- 3** Ballast support
- 4** SolarSpeed backplate
- 5** Clamps
- 6** Ending rubber

THE CLAMPING INSTRUCTIONS FOR THE MODULES SHOULD BE PROVIDED BY THE MODULE MANUFACTURER.


- Premounted brackets
- "Fit & click" frame
- Very fast mounting
- Ideal for flat roofs
- Produced with Magnelis steel*
- Limited ballast

*Magnelis steel is galvanised steel of which the zinc alloy contains Aluminium and Magnesium. This provides a very persistent corrosion resistance and protecting covering in aggressive environments.

AVAILABLE ANGLES/PITCHES

| | Angle | Pitch |
|----------------|-------|---------|
| Standard angle | 12.5° | 1600 mm |
| Also available | 10° | 1500 mm |
| | 15° | 1750 mm |

Other angles & pitches available on request

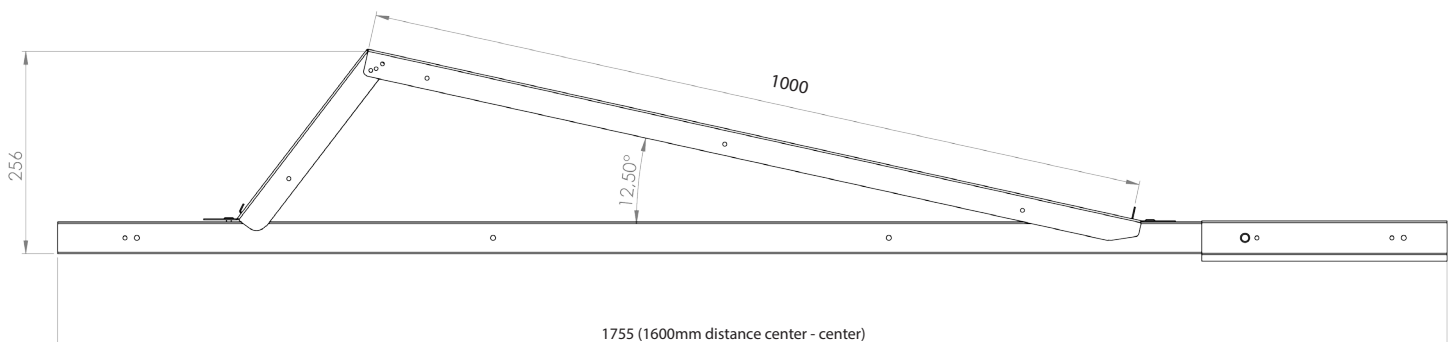

info@avasco-solar.be